

# COMPACT S5

## TECHNICAL SPECIFICATIONS



**TABLET STYLE TOUCH SCREEN**  
**WIDE RANGE OF PAYMENT METHODS**

### GENERAL DESIGN


<b>MATERIAL</b>	Mix of stainless steel, aluminium & mild steel
<b>WEIGHT</b>	78-85kg / 165-187 pounds
<b>TEMPERATURE/ HUMIDITY</b>	<ul style="list-style-type: none"> <li>• <b>Operating temperature:</b> -30°C to +55° C / -86°F to +131°F</li> <li>• <b>Humidity:</b> up to 95% (non condensing)</li> </ul>
<b>COLOR</b>	Cale Gray, RAL 3020, RAL 5003, RAL 7047, RAL 9005. Others on request
<b>COMPLIANCE</b>	EN12414 / CE marking FCC, ADA, DDA, Equality Act 2010, PMR Designed and produced according to ISO 9001 and ISO 14001

### USER INTERFACE

<b>TOUCH COLOR SCREEN</b>	<ul style="list-style-type: none"> <li>• 9,7" full-color touch screen monitor with LED automatic adaptive back lighting</li> <li>• 262,144 colors</li> <li>• Reinforced 6mm thick tempered glass (IK10) - Anti-glare treatment</li> <li>• <b>Dimensions:</b> 196,61 mm x 147,46 mm / 7,74" x 5,8"</li> <li>• <b>Resolution:</b> 1024 x 768 pixels</li> </ul>
---------------------------	--

# COMPACT S5

## TECHNICAL SPECIFICATIONS

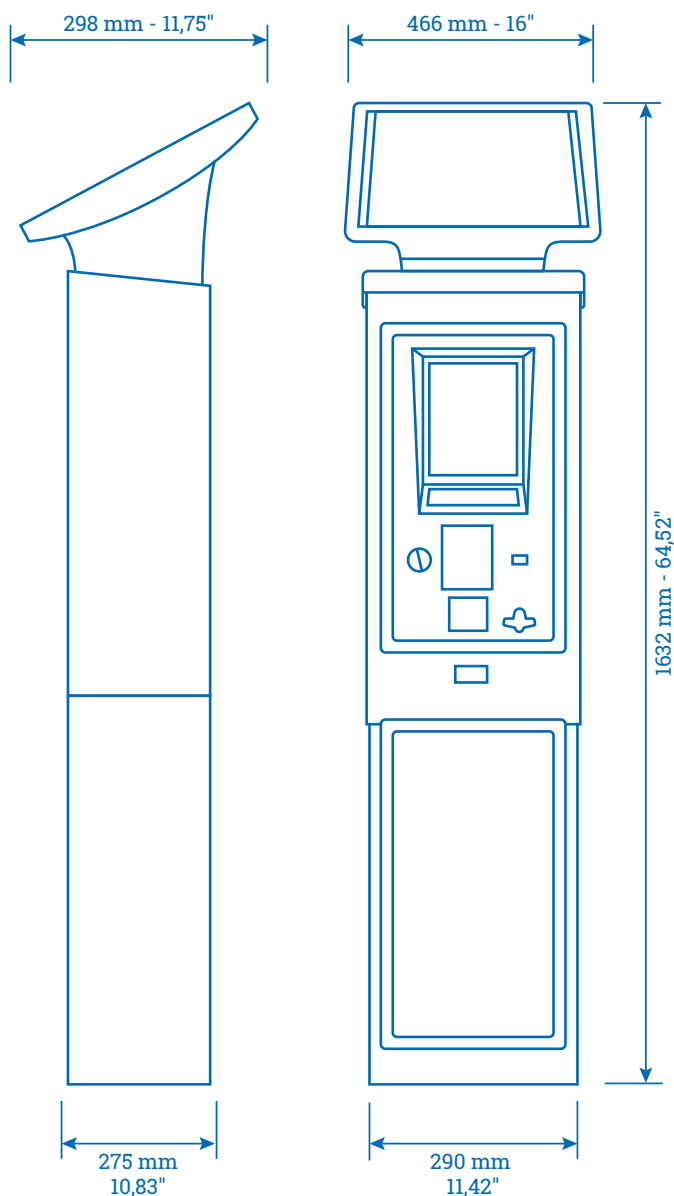

### PAYMENT OPTIONS

<b>COIN SELECTOR</b>	<ul style="list-style-type: none"> <li>Patented motor-driven coin selector</li> <li>Up-to 14 types of coins or tokens accepted</li> <li>Automatic opening upon coin insertion</li> <li>Multi-criteria coins identification</li> </ul>
<b>CONTACTS &amp; CONTACTLESS</b>	<ul style="list-style-type: none"> <li>Smartcards &amp; bank cards</li> <li>M1000 card reader: PCI PTS 4.x / EMV Level 1 &amp; 2 / AFAS (France)</li> <li>P1000 PINPad: PCI PTS 4.x</li> <li>A1000 contactless &amp; NFC reader: PCI PTS 4.x / EMV Contactless Level 1 &amp; 2 (Entry point, C2/Visa, C3/MasterCard, C4/Amex, C6/Diners-Discover) / ISO14443 A-B / Mifare</li> </ul>
<b>OTHER</b>	<ul style="list-style-type: none"> <li>Cashless configuration available</li> <li>Atos and Payment Express kits also available</li> </ul>

### COLLECTION

<b>RAPIDE</b>	Exchangeable cashbox: 4,6 litre capacity
---------------	--

### POWER SUPPLY

<b>MAINS</b>	230V / 115 VAC
<b>SOLAR</b>	12V, 30W Top hat 360° solar panel with integrated LED lights
<b>BATTERY OPERATION</b>	12V DC

### TICKETS

<b>THERMAL GRAPHIC PRINTER</b>	<ul style="list-style-type: none"> <li>Horizontal or vertical printing</li> <li>Text &amp; logo, 8 dots per mm (203 dots per inch per line, 448 dots per column)</li> </ul>
<b>PAPER OR SELF ADHESIVE TICKET</b>	<ul style="list-style-type: none"> <li>60 x 70mm / 2,36" x 2,75" (W x L)</li> <li>Capacity: 6500 tickets</li> </ul>

### COMMUNICATION

<b>MODEM</b>	3G/4G
<b>CONNEXION</b>	Ethernet
<b>SYSTEM</b>	Powerful 800 MHz engine running Windows embedded with up to 2 Gb of storage

### SECURITY

<b>MONEY STORAGE</b>	EN14450
<b>PROTECTION</b>	<ul style="list-style-type: none"> <li>Vibration detector</li> <li>Double security vault access</li> <li>Electronic lock system</li> <li>Safety: IP24D &amp; IK9 to IK10</li> </ul>

### ENVIRONMENT

<b>RECYCLABILITY</b>	Level A - 99%
<b>EUROPEAN DIRECTIVES</b>	2011/65 RoHS & 2012/19 WEEE

### MISCELLANEOUS

<b>SCAN</b>	1D-2D QR code reader
<b>MOUNTING FRAME</b>	Compatible with Flowbird and main competitors base anchors
<b>ANCHORING</b>	Different sizes of pedestals (Standard, short) and foundation frames
<b>AUDIO</b>	Multi language audio support with pre-recorded messages and sounds
<b>HEATER</b>	High efficiency heater with thermostat (Mains only)